


User Manual

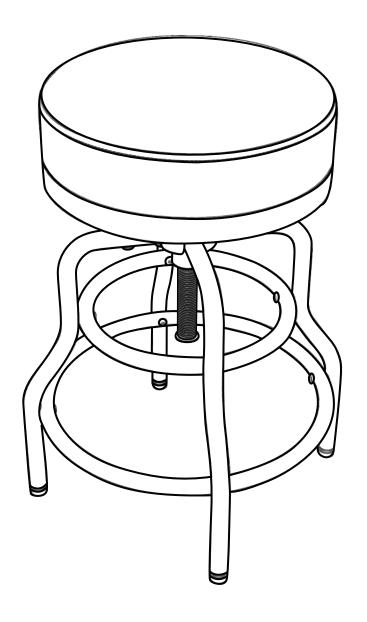

Bonded Leather Upholstered Round Barstool

IMPORTANT NOTICE

Dear customer:

If you receive a product with missing or damaged parts, or if you have any questions about the barstool, please contact Raynesys customer service mailbox for feedback, and we will give you a satisfactory solution.

We are very sorry for the possible inconvenience, and thank you for your understanding and support. Raynesys wishes you a happy life.

You can contact us by following ways:

(1)Raynesys customer service mailbox:

support@iRaynesys.com

(2)Contact us on Amazon: From your Amazon order details page, select

"Order" >> "Sold by" >> "Contact seller".

Attn:

- 1.Do NOT let your kids climb on the barstool!
- 2.Prevent children from ingesting anti-mold chip and desiccants in the package!







MAINTENANCE ADVICE

- 1.Please use a soft cloth or clean damp cloth for cleaning. Do NOT use bleach or abrasive cleaners.
- 2.Please store in a dry and cool area, avoiding high temperatures and direct sunlight to protect the finish.
- 3.Do not allow dirt to remain on the surface for a long time.
- 4.Please use a damp and clean cloth to immediately absorb any spilled liquid.
- 5.Do NOT lean with products containing the following: acetone (e.g., nail varnish remover), ammonia (e.g.bleach), or sodium hydroxide(e.g., caustic soda, drain, and oven cleaners).
- 6.Please check whether there are missing screws in the product regularly.
- 7. The product should NOT be discarded with household waste, and please take it to your local authority waste disposal center.

PARTS LIST

A(x1)	В	B(x1)		C(x1)	
Barstool Seat	Central S	Central Support Rod		Fixed Nut with Rod	
D(x1)	E(x4)	F(x1)		G(x1)	
Barstool Leg Connector	Barstool Leg	Small Ring Footrest		Large Ring Footrest	

HARDWARE LIST

H(x4)	I(×8)	J(x8)	
M6*20 Screws	M6*25 Screws	M6*35 Screws	
K(x1)	L(x1)	M(x1)	
M6 Screw Wrench	M6 Screw Wrench	M6 Screw Wrench	

ASSEMBLY STEPS

Please Note:


Please tighten the screws of the barstools for 6 months or irregularly.

The installation requires a lot of screws, it is recommended to use an electric drill to install.

Step 1


Assemble the central support rod (B) to the barstool seat (A) with M6*20 screw (H).

Note: Tighten the screws to a depth of 70%.

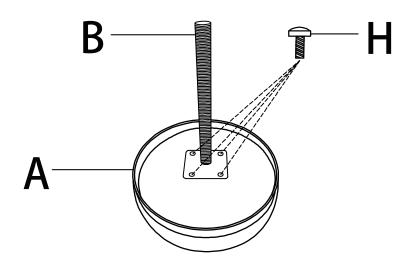


Step 2

Rotate fixed nut with rod (C) to assemble it with central support rod (B).



Assemble the barstool leg (E) to the barstool leg connector (D) with M6*16 screw (I).


Note: Tighten the screws to a depth of 70%.

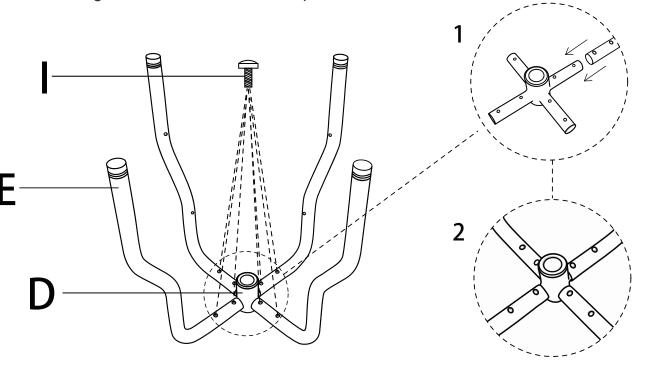

Step 4


Assemble the small ring footrest (F) to the barstool leg (E) with M6*35 screw (J).

Note: Tighten the screws to a depth of 70%.

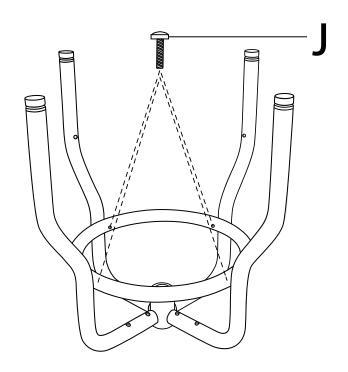


Assemble the large ring footrest (G) to the barstool leg (E) with M6*35 screw (J).

Note: Tighten the screws to a depth of 70%.

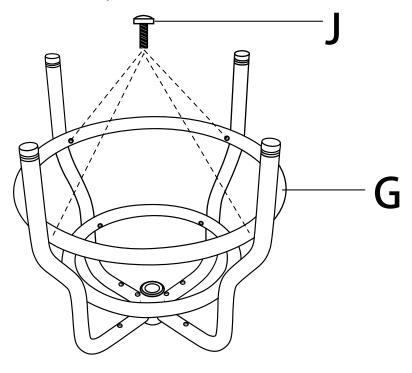


Step 6

Align the opening of decorative cover (M) to iron pipe, and snap with a gentle pressure.

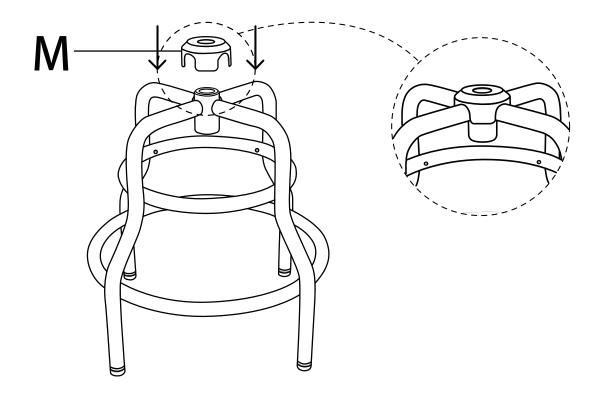


Align the hole, rotate the part of barstool seat to assemble with the part of barstool leg.

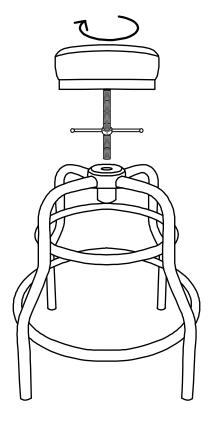

Step 8

Assemble the screw with washer (K) as picture shown.

Note: Align the screw holes and tighten them to 70%. Please check and then tighten them all to 100%.

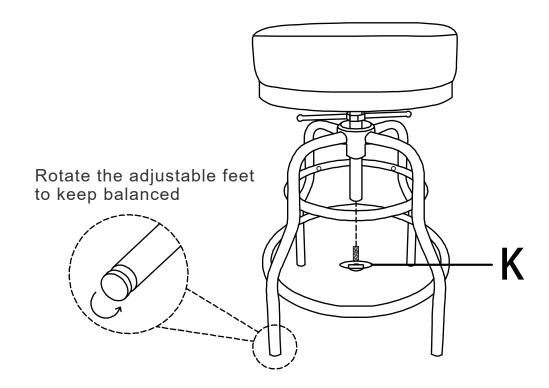

Check whether the barstool is stable and then ready to use.

Note: Check whether all screws are tightened before use.

